




STAR HEADLIGHT & LANTERN CO.


MICROSTAR™ LED LIGHT



DLITE




50° Spread

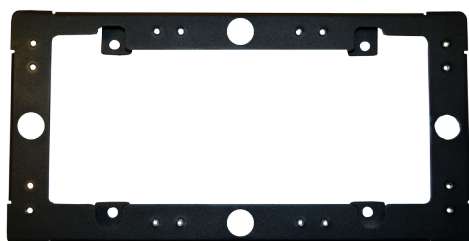

274-DLIT-LPB4



DLITS



15° Spread



274-DLIT-RL



274-DLIT-U

Specifications and Features

- Ultra low profile
- Six super bright Star Generation V LEDs
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Robust design, die cast aluminium base
- Endless mounting possibilities
- Single and split color models
- Current limit protection over entire operating voltage
- Standard four wire hook-up
- S-Link System™ synchronizing capabilities with other Star LED units

- Optional chrome or white bezels available
- Dimensions: 1"H x 4 ³/₁₆"W x ²⁵/₆₄"D
- Voltage: 10-30V DC
- Amp draw: 0.75 amps
- Color availability:
- Split color:

- Approvals: SAE Class I, CA Title 13 available where applicable

* approvals only apply when properly configured

Model Numbers/Descriptions:

DLITE-**	Six array LED head, wide spread optic
DLITS-**	Six array LED head, spot spread optic
274-DLIT-RL	License plate bracket for two DLIT's
274-DLIT-LPB4	License plate bracket for four DLIT's
274-DLIT-U	Universal bracket for DLIT's
P30019-289P	Chrome bezel add on
P30019-289W	White bezel add on

SF172 Rev D 07-13-2017



Star Headlight & Lantern Co., Inc.

455 Rochester Street
Avon, NY 14414
Phone: 585-226-9500
Fax: 888-478-2797
starheadlight.com



PROUDLY MADE IN THE U.S.A
An ISO 9001:2008 Certified Company




STAR HEADLIGHT & LANTERN CO.

MICROSTAR™ LED LIGHT




DLIT3E



50° Spread



DLIT3S



15° Spread

Specifications and Features

- Ultra low profile
 - Three super bright Star Generation V LEDs
 - 12 different selectable flash patterns in either of two phases, plus steady-on
 - Robust design, die cast aluminium base
 - Endless mounting possibilities
 - Current limit protection over entire operating voltage
 - S-Link System™ synchronizing capabilities with other Star LED units
 - Dimensions: 1"H x 3 1/16"W x 7/16"D
 - Voltage: 10-16V DC
 - Amp draw: 0.3 amps
 - Color availability: 
 - Approvals:
 - DLIT3E: SAE Class II (amber, blue, red, white)
 - DLIT3S: SAE Class I (amber, blue, red, white)
- * approvals only apply when properly configured

Model Numbers/Descriptions:

DLIT3E-*	Three array LED head, wide spread optic
DLIT3S-*	Three array LED head, spot spread optic

STAR
WARNING
SYSTEMS®

STAR SIGNAL
VEHICLE PRODUCTS®

Star Headlight & Lantern Co., Inc.

455 Rochester Street
Avon, NY 14414
Phone: 585-226-9500
Fax: 888-478-2797
starheadlight.com



BRADFORD™
Vehicle Solutions Inc.



PROUDLY MADE IN THE U.S.A
An ISO 9001:2008 Certified Company