




	MODEL	dB	AMP	VOLTAGE	SAE J994
SINGLE TONE (HO2052)	64-087	87	.06	9-32 vdc	X
	64-097	97	.13	9-32 vdc	X
	64-097-12	97	.13	12 vdc	X
	64-102	102	.14	9-32 vdc	X
	64-107	107	.40	10-32 vdc	X
DUAL TONE AUTO ADJUST	64-097DT	97	.30	9-32 vdc	
	64-707A	77-97	.4	10-32 vdc	
	64-802A	82-102	.4	10-32 vdc	
	64-807A	87-107	.4	10-32 vdc	X
	MODEL	dB	AMP	VOLTAGE	SAE J994
SINGLE TONE	64G-087	87	.06	9-32 vdc	X
	64G-097	97	.13	9-32 vdc	X
	64G-097-12	97	.13	12 vdc	X
	64G-102	102	.14	9-32 vdc	X
	64G-107	107	.40	10-32 vdc	X
DUAL TONE AUTO ADJUST	64G-097DT	97	.30	9-32 vdc	
	64G-707A	77-97	.4	10-32 vdc	
	64G-802A	82-102	.4	10-32 vdc	
	64G-807A	87-107	.4	10-32 vdc	X





REV.	ECR	DESCRIPTION	DATE
-	9850	INITIAL DRAWING REQUEST	8/1/2011
A	10933	ADDED COOLDRIVE MODEL HO2052	1/21/2013
B	14250	REMOVED 64-107-12, 64-107-24, 64G-107-12, 64G-107-24. ADDED 64-107, 64G-107. UPDATED CURRENT AND VOLTAGE VALUES RELATED TO 449 CIRCUIT UPDATE.	3/16/2017
C	14769	UPDATED VOLTAGE AND CURENT SPECS DUE TO CIRCUIT CHANGES.	12/22/17
D	15128	UPDATE MODEL CHART, NOW ROHS	4/2/2018

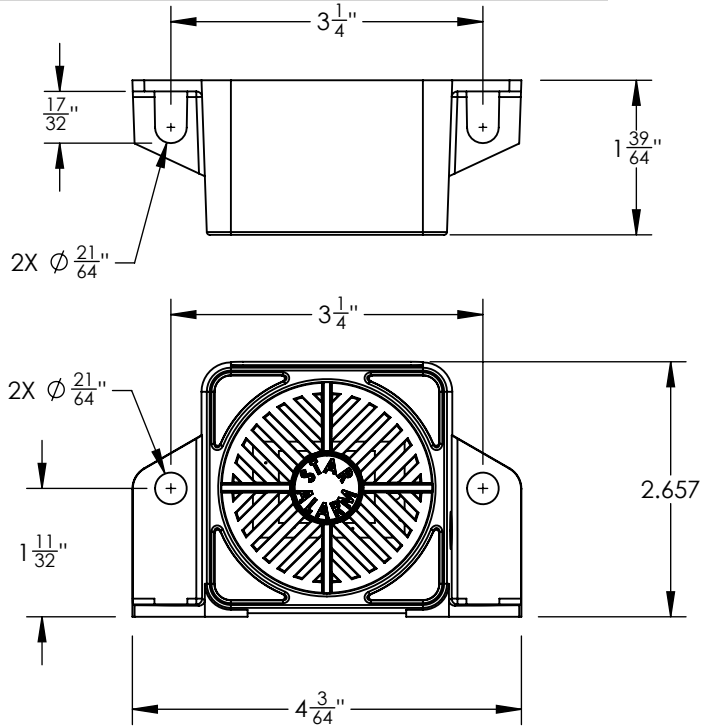

64-\*\* w/ 9" WIRES



64G-\*\* LUGS  
w/ GROUND STRAP

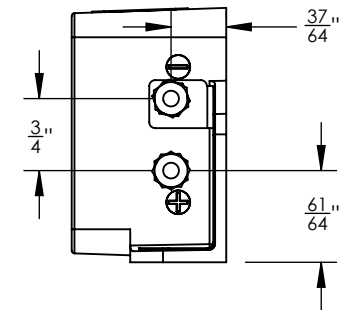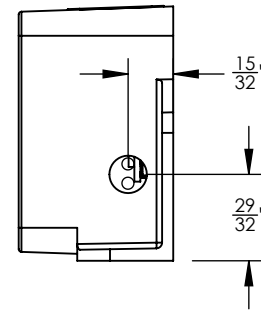

- AGENCY APPROVALS: SEE MODEL CHART
- TEMPERATURE RANGE: -40 TO +85C
- dB TOLERANCE: ± 4 dB

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 2 DEG. .X ± .100 .XX ± .020 .XXX ± .005 .XXXX ± .001	DRAWN BY: SWN	<b>STAR HEADLIGHT &amp; LANTERN CO., INC.</b> 455 Rochester St. Avon NY 14414 Ph:(585) 226-9500 Fax: (585) 226-2029 MODEL: 64-* SERIES, HO2052
	DRAWING APPROVED BY ECR	
RoHS COMPLIANT: YES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.	
MATERIAL: N/A	TITLE: MODEL DRAWING	
FINISH: N/A	DWG. NO. 64 SERIES	REV D
	SCALE: 1:2	DO NOT SCALE FROM DRAWING SHEET 1 OF 1